



DEPARTMENT OF CODES & REGULATIONS  
DIVISION OF PLANNING & DESIGN SERVICES

LOUISVILLE, KENTUCKY

JERRY E. ABRAMSON  
MAYOR

WILLIAM P. SCHRECK  
DIRECTOR

Planning Director's Interpretation Number 03-08

Attached Sign Height Interpretation – June 27, 2008

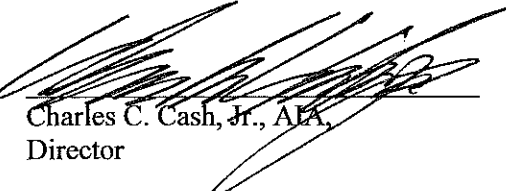
LDC Section 8.3.2.C states:

1. In Neighborhood, Traditional Neighborhood, Village, Town Center Form Districts attached signs shall not be located more than three (3) feet above the ceiling of the first floor of the building.
2. In Campus, Regional Center, Suburban Workplace, Suburban Marketplace Corridor and Downtown Form Districts attached signs shall not be located more than three feet above the ceiling of the upper most floor of the building.

The following interpretation resolves inconsistencies in the application of this regulation:

1. In Neighborhood, Traditional Neighborhood, Village, Town Center Form Districts *the lowest edge of an attached sign shall not be located more than three (3) feet above the ceiling (top of the structural ceiling assembly) of the first floor of the building. No attached sign shall be higher than the top of a parapet (or other) wall to which it is attached.*
2. In Campus, Regional Center, Suburban Workplace, Suburban Marketplace Corridor and Downtown Form Districts *the lowest edge of an attached sign(s) shall not be located more than three feet above the ceiling (top of the structural ceiling assembly) of the upper most floor of the building. No attached sign shall be higher than the top of a parapet (or other) wall to which it is attached.*

Approved By:

  
Charles C. Cash, Jr., AIA,  
Director

Effective Date: June 27, 2008